

Available in:  
**4 x 600W + 7 AMP (FANS)**

- Max.
- 4 x 600 W
  - 7 AMP
  - 7 AMP, 1600 W
  - 3 AMP, 700 W
  - 10 AMP, 2400 W

**HYBRID AND MULTIFUNCTIONAL**





Serie: TG Type: TG-7

## COMPLETE CONTROL: LIGHT SWITCH, VENTILATION, TEMPERATURE AND HUMIDITY

### ALL-IN-ONE Controller: Next level

CLI-MATE is happy to present its most complete device for the control of the indoor environment yet. The main aspects of control are:

- Time switch for up to 4 lights of 600W.
- Humidity control: One inlet for a humidifier and another inlet for a dehumidifier. The controller activates one of those devices when necessary (hysteresis of 5% rH)
- Fans and day temperature control
- Heater and night temperature control


Control the day & night temperature

Complete humidity control

Double sensor: temperature & humidity

#### Technical data

Temperature range	: 5-55°C
Humidity range	: 20-100% rH
Power supply	: 1-fase 220/240V – 50Hz
Switching differential	: 1°C / ±5% rH per step (hysteresis)
Heater inlet	: Max. 2400 WATT
Lamp inlet	: Max. 600 WATT
Protection class	: IP44
Measures	: 250 x 220 x 120 mm

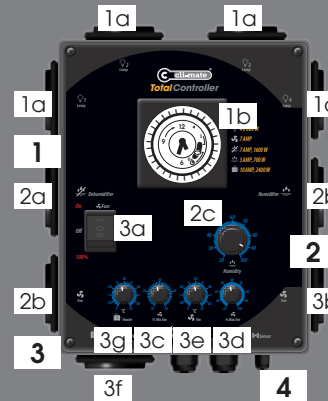

- 1 = TIMER RELAY**  
1a = Inlet for Lamp  
1b = Timer
- 2 = HUMIDITY CONTROLLER**  
2a = Inlet for Dehumidifier  
2b = Inlet for Humidifier  
2c = Set the desired humidity level
- 3 = FAN CONTROLLER**  
3a = On-off-100  
3b = Inlet for Fan/s  
3c = Set the minimum fan speed  
3d = Set the maximum fan speed  
3e = Set the desired day temperature  
3f = Inlet for Heater  
3h = Set the desired night temperature
- 4 = Double sensor**  
(temperature and humidity)

NOTE: **NEVER** surpass the maximum charge recommended (per inlet)



The design and the writing of this leaflet have been realized with the most thorough accuracy. We do not take responsibility for printing or typing mistakes.