


GIB Lighting LXG Timer 600W High Frequency Dimmable E-ballast

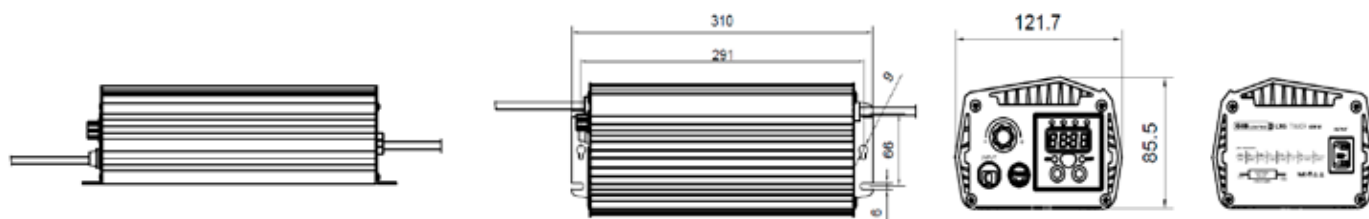

Input		Output			
Voltage Range	180~265Vac	Rated Power	600W		
Rated Voltage	240Vac	Output Current	≤1.7		
Frequency Range	50~60Hz	Wave Crest Ratio			
Inrush Current	TBD	Frequency	≥40kHz		
Rated Current	2.8A@240Vac	Ignition Voltage	≤4.5kV		
Power Factor	≥0.98@Rated Input	Dimming Function	250W~660W		
Power Efficiency	≥92%@Rated Input	Maximum Starting Current	5.8~7.8A		
Total Harmonic Distortion	≤10%@Rated Input				
Standards and Certification		Working Environment		Protections	
Safety Regulation	IEC61347	Ta	-20°C~+50°C -4°F~+122°F	Short Circuit	Yes
EMI	TBD	Tc	≤80°C ≤176°F	Open Circuit	Yes
EMS	IEC61547	Storage Temperature	-40°C~+70°C -40°F~+158°F	Lamp Failure	Yes
Quality Standard	ISO9001	Storage Humidity	≤95%	Low Voltage	≤175Vac
Environmental Standard	ISO14001	Humidity	10%~90%	Over Voltage	>270 Vac
				Over Temperature	Yes
Mechanics			Lamp		
Dimensions (LxWxH)	310x121.7x85.5 mm		Distance (lamp to ballast)	≤15M	
Protection	IP63		Lamp Type	MH/HPS	
Weight	2.3~3.3Kg		Lamp Voltage	75 ~145Vac	
Fan	No		Rated Lamp Power	600W	
Potting	YES				